# This Page Is Inserted by IFW Operations and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

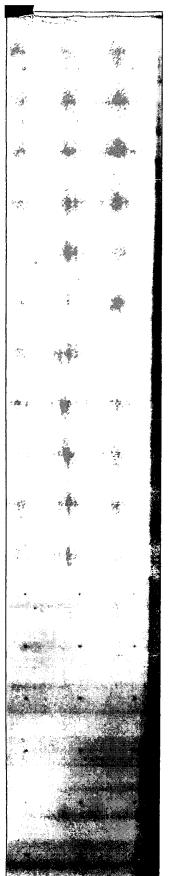

#### **EUROPEAN PATENT OFFICE**

#### **Patent Abstracts of Japan**

PUBLICATION NUMBER : 08048004 PUBLICATION DATE : 20-02-96

APPLICATION DATE : 04-08-94 APPLICATION NUMBER : 06183753

APPLICANT: TORAY IND INC;

INVENTOR: NAKAHARA KATSUJI;

INT.CL. : B32B 27/00 B32B 27/36 C09J 7/02

TITLE : RELEASE FILM

ABSTRACT : PURPOSE: To provide a release film capable of being used in mold release because of its

excellent heat resistance, releasability and slip properties.

CONSTITUTION: In a release film formed by laminating a release layer (I) and a polyalkylene 2,6-naphthalate film in this order, the center line surface roughness of the surface on the side of the release layer (I) of the polyalkylene naphthalate film (II) is

0.10-0.50µm.

COPYRIGHT: (C)1996,JPO